


45139205

Rigid copper bar 2900mm 125x5 solid

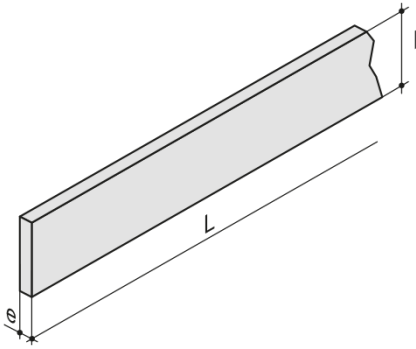

General characteristics

- Thickness: 4.5 and 10 mm.
- Width: 20 to 160 mm.
- Length: 1750, 2900, 5800 mm.

[Link to the reference](#)

Solid copper bars for primary or secondary distribution busbars.

Standards

Conformity to standards	IEC
-------------------------	-----

Technical Characteristics

Length of the product unit [mm]	2900
Width of the product unit [mm]	125
Depth of the product unit [mm]	5
Weight [kg]	16.5
Height [mm]	125
Length	2900
Model	Rigid Bar
Thickness	5

ETIM - Electrical characteristics

Rated current In [A]	1300
----------------------	------

ETIM - Mechanical characteristics

Length [mm]	2900
Width [mm]	125
Height [mm]	5
Surface protection	Untreated

ETIM - Technical features

Model	Other
Flexible	No

Logistics

GTIN/EAN	3596031223930
Customs number	7409190000
Price unit	PC
Weight of the packing unit [kg]	16.5
Length of the packing unit [m]	0.005
Width of the packing unit [m]	0.125
Depth of the packing unit [m]	2.9

Product Details

Effective date	1997-01-31
Offer Life Cycle Code	40
Country of origin	FR

Classification

UNSPSC	26121634
ETIM Class	EC001522
IGCC	1786