


48290657

Sensor iTR-21 21mm 63-250A

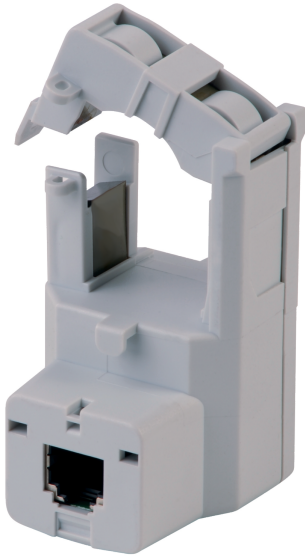

Strong points

- Plug & Play
- Accurate
- VirtualMonitor technology
- AutoCorrect technology

General characteristics

- Range from 25 to 600 A.
- Used with power monitoring device DIRIS Digiware, DIRIS A, DIRIS B.
- PreciSense technology: Accurate.
- Easy installation and configuration.

Compliance with standards

- UL 61010-1 CSA-C22.2, 61010-1, Guide PICQ, File E257746
- IEC 61557-12
- ISO 14025

Link to the reference

<https://www.socomec.us/en-us/reference/48290657>

iTR split-core current sensors are used with DIRIS Digiware I, DIRIS A, or DIRIS B Power Monitoring Devices to measure currents from 25 to 600 A, with the same guaranteed accuracy. The quick RJ12 connection, and the integrated intelligence prevent, any wiring or configuration errors.

iTR split-core sensors are placed around the live conductors without disrupting the wiring and the supply, highly convenient for retrofit applications.

The iTR range offers outstanding technologies:

VirtualMonitor which gives the real time physical state of protective devices

AutoCorrect which detects wiring errors and corrects them to guarantee consistent readings.

----- System -----	
Fill rate E-Order Common	29
Fill rate E-Order Selection	100
Certificates and Declaration	
Conformity to standard #1	UL 61010-1 Guide PICQ File E257746
Conformity to standard #2	CSA-C22.2 No. 61010-1
Conformity to standard #3	IEC 61557-12
Conformity to standard #4	ISO 14025
Proposition 65 California	WARNING This product can expose you to chemicals including bisphenol A (BPA), which is known to the State of California to cause birth defects or reproductive harm. For more information go to : www.P65Warnings.ca.gov
Standards	
Conformity to standards	IEC UL
Certificates and Declaration - Safety	
UL file number	E257746
General Product Characteristics	
Device type	Current sensors for DIRIS A, DIRIS B & DIRIS Digiware I
Technical Characteristics	
Model	iTR-21
Opening	0.83 in / 21 mm
Rated current [A]	63 ... 250 A
Secondary rated current	RJ12
Technical Characteristics - Electrical	
Intermittent overload	10x In for 1s
Max voltage (Phase/neutral)	300
Rated withstand voltage	3kV
Technical Characteristics - Environmental	
Maximum operating altitude	6560 feet / 2000 m
Measurement category	CAT III
Operating temperature	-10 ... +70 °C / +14 °F ... +158 °F (IEC 60068-2-1/IEC 60068-2-2)
Relative humidity	95% RH without condensation
Storage temperature	-25 ... +85 °C / -13 °F ... +185 °F (IEC 60068-2-1/IEC 60068-2-2)
Technical Characteristics - Measurement	
Accuracy class	0.5 for the global measurement chain (Associated with Digiware I, DIRIS B & DIRIS A)

Current rating range	63 ... 250 A
Current Sensor Secondary type	100mV
Current sensor type	Split Core
Degree of Pollution	IP20 / IK06
Frequency rating	50/60 Hz
Full measurement range	1.26 ... 300 A
ETIM - Electrical characteristics	
Rated primary current [A]	250
Rated secondary current [A]	0.1
Rated secondary apparent power [VA]	0.1
Accuracy class	0.2S
Overcurrent limiting factor	FS 10
Calibrated	Yes
ETIM - Mechanical characteristics	
With contact protection	Yes
Height opening [mm]	21..21
Width opening [mm]	21..21
Opening diameter [mm]	21
Snap mounting	Yes
With copper rail	Yes
Secondary connection	Plug-in connection
ETIM - Technical features	
Model	Attachable current transformer
Number of primary inputs	1
Logistics	
GTIN/EAN	3596033020094
Customs number	8504312990
Price unit	PC
Weight of the packing unit	0.104
Length of the packing unit	0.05
Width of the packing unit	0.13
Depth of the packing unit	0.17
Product Details	
Effective date	2018-01-01
Country of origin	FR
Discount Policy	1EN30
Discount Policy Label	SENSORS
Classification	
UNSPSC	83101808
ETIM Class	EC002048
IGCC	6042