


# STATYS Integrable

Redundant design for power availability and site maintainability  
from 200 A to 800 A

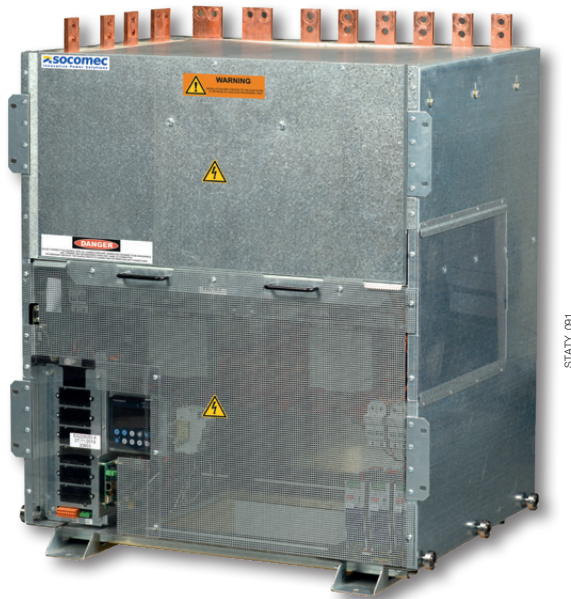

## The solution for

- > Integration in switchboard and PDU
- > Data center
- > Finance, banking and insurance
- > Healthcare sector
- > Telecom & Broadcasting
- > Industry
- > Power generation plants
- > Transport

## Advantages

- > Easy integration
- > Unparalleled serviceability
- > Best resiliency
- > Robust design

## Conformity to standard

- > UL 1008s  
Guide WPXT  
E513909
- > IEC 62310-2  
(EMC Immunity & Emission)



## Function

**STATYS Integrable** is a fully integrated static transfer power unit for integration into a cabinet or a power distribution unit (PDU).

Supplied by two independent sources, STATYS Integrable increases the overall electrical infrastructure availability during abnormal events and programmed maintenance.

### Easy integration

- Pre-engineered mechanical and electrical connections for ease of integration into cabinets or PDUs.
- Installed simply by one operator with no special equipment required.
- STATYS Integrable is operated by any HMI via a single connection bus using Modbus protocol.

### Unparalleled serviceability

- STATYS Integrable can be easily integrated or swapped with a new one, without the need of specific tools.
- Preventive maintenance is made quick by front accessible components and drawer mounted fans.

### Best resiliency

- Full redundant internal design ensuring no single point of failure.
- Internal segregation between critical functions to prevent a fault propagation.
- Load protection ensured even during an internal fault.

### Robust design

- Compatible with all types of electrical infrastructure and applications.
- Fully rated SCR ensures no restriction to the continuation of operation.

## High reliability - Internal redundant design

### Main features:

- Triple redundant power supplies.
- Full redundant DC power bus.
- Redundant microcontroller.
- Redundant SCR drivers.
- Cooling redundancy up to 104 °F/ 40 °C .
- Equipped with an “auto-hold” feature to ensure load continuity in case of internal failure.
- Real-time SCR fault sensing.
- Separation of main functions to prevent internal fault propagation.
- Robust internal field communication bus.
- Internal monitoring of sensors to ensure maximum system reliability.

## Minimized MTTR

- Easy replacement of the power supplies.
- Drawer mounted fans with quick disconnect.
- Cold swap of the entire STATYS Integrable power unit.

## Standard features

- A smart and flexible transfer system that can be configured according to the type of load.
- Synchronized and non-synchronized sources compatibility (configurable synchronization tolerance and switching management).
- Output fault current sensing.
- Full breaker management.
- ATSM (Advanced Transformer Switching Management).
- Available in switched and non-switched neutral.

## Standard communication features

- Dry-contact interface (configurable voltage-free contacts).
- Ethernet interface for STATYS Integrable monitoring via WEB pages.
- MODBUS TCP.
- Full digital configuration and setting.
- Single point access for manufacturer HMI.

## Communication options

- Additional dry-contact interface. (configurable voltage-free contacts).
- MODBUS RTU RS485.

## Technical data

STATYS INTEGRABLE				
Rating [A]	200	400	600	800
<b>ELECTRICAL SPECIFICATIONS</b>				
Rated voltage	208-220/380-415/480/600 V			
Voltage tolerance	± 10% (configurable)			
Non-synchronized sources management	configurable up to ±180			
Frequency	50 Hz or 60 Hz ± 5 Hz (configurable)			
Number of phases	3ph+N or 3ph (+ PE)			3ph (+PE)
Number of poles switching	3 or 4-pole switching			3 pole switching
Maintenance bypass (cabinet version)	monitoring up to 6 breakers			
Overload	150% for 2 minutes - 110% for 60 minutes			
Efficiency	99 %			
Admissible power factor	no restrictions			
<b>ENVIRONMENT</b>				
Operating ambient temperature	32-104 °F / 0-40 °C			
Relative humidity	95%			
Maximum altitude	3280 ft / 1000 m a.s.l. without derating			
Acoustic level at 3.28 ft / 1m (ISO 3746)	≤ 60 dBA			
<b>STANDARDS</b>				
Safety	UL 1008 S			
EMC	C2 category IEC 62310-2, FCC part 15			



Pre-engineered solution for easy integration into the cabinet.

APPL\_1002