


boltswitch


Bulletin 117

“T GENEVA” OPEN TYPE SWITCHES


**FOR MOUNTING IN DEAD FRONT SWITCHBOARDS
SIDE-BY-SIDE SERIES T SWITCHES WITH GENEVA DUAL OPERATOR**

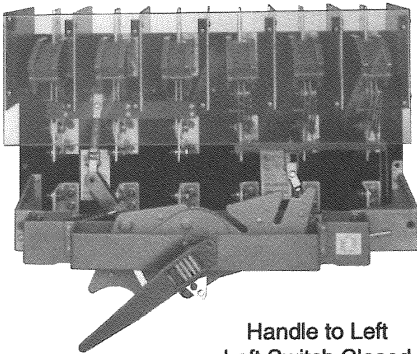

Handle to Left
Left Switch Closed

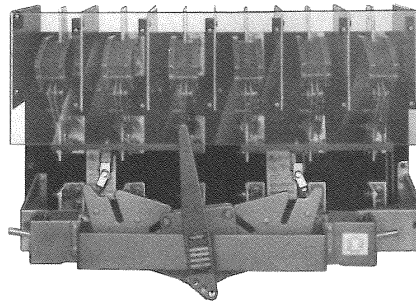

Handle Up
Both Switches Open

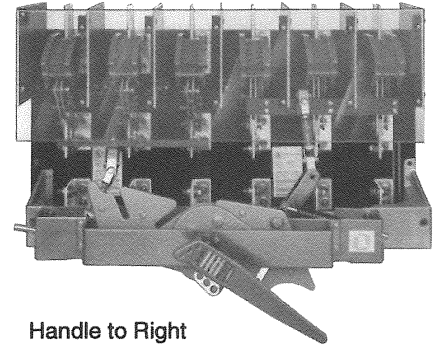

Handle to Right
Right Switch Closed

APPLICATION:

These switches are intended for use wherever it is desirable to have two independent switches operated by a common manual operator, as in two source service entrance switchgear. They will receive Class T Fuses.

RATING:

400 or 600 amperes for use at 240 or 600 volts AC, but may be rated 125 volts DC if specified. AC rated switches have standard horsepower ratings. The UL listed short circuit current rating is 200,000 RMS symmetrical amperes, or 50,000 amperes at 125 volts DC.

TESTS:

Conducted in accordance with UL 98. These switches are UL listed as “Switches, Open Type” under File No. E-37690.

FEATURES:

Fault Current Ratings • Bolted Pressure Contacts • Load Break Design • Quick-Make Quick-Break Operators • Visible Contacts • Silver Plated Copper Current Carrying Parts • Grid Type Arc Chutes on All 600 Volt Switches • Terminals Designed For Lugs or Bus Bars • Provisions For Up to Three Padlocks.

MAKE-BEFORE-BREAK:

Available for non-interruptible power supplies. Add suffix-C to catalog number.

OUTLINE DRAWINGS:

2-pole 2-wire and 3-pole 3-wire are per Dwg O-1159. 4-pole 4-wire is per Dwg O-1217.

BREAK-BEFORE-MAKE CATALOG NUMBERS

VOLTAGE	AMPACITY		2-POLE, 2-WIRE	3-POLE, 3-WIRE	4-POLE, 4-WIRE
	LEFT SWITCH	RIGHT SWITCH			
240 AC [†]	400	400	T225-5	T325-5	T425-5
	400	600	T225-6	T325-6	T425-6
	600	400	T226-5	T326-5	T426-5
	600	600	T226-6	T326-6	T426-6
600 AC	400	400	T265-5	T365-5	T465-5
	400	600	T265-6	T365-6	T465-6
	600	400	T266-5	T366-5	T466-5
	600	600	T266-6	T366-6	T466-6

[†] Alternate 125 VDC rating, specify when ordering

boltswitch, inc. 6208 Commercial Road Crystal Lake, Illinois 60014

www.boltswitch.com

H:\ART-CATBUL-117\BUL-117.VP JANUARY 2003